


CLOSED WEDGE SOCKETS


QUENCHED AND TEMPERED CAST STEEL

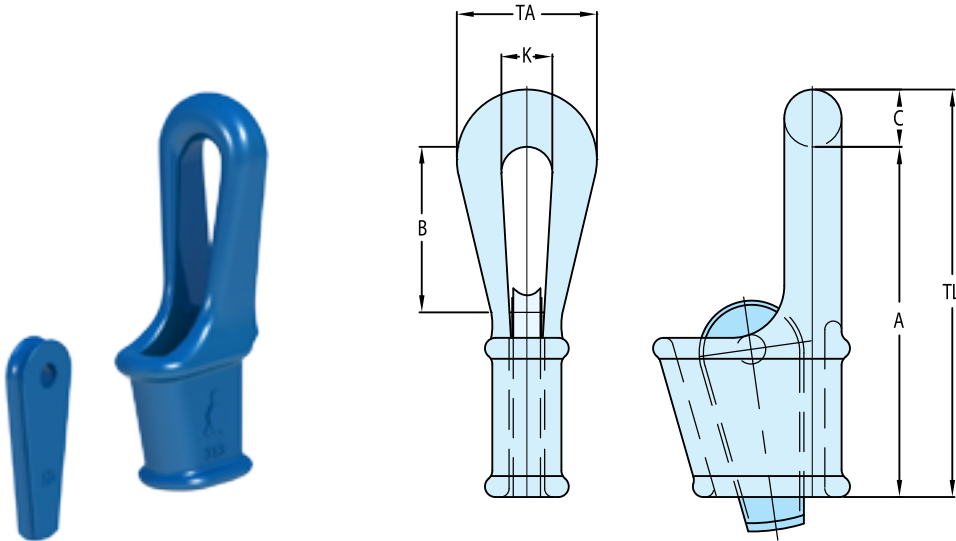

MODEL NR.	MBL (USTONS)	FOR WIRE Ø		DIMENSIONS (INCH)						WEIGHT (LBS)
		MM	INCH	A	B	C	K	TA	TL	
CWS 303	44	18-19	3/4	8 11/16	3 15/16	1 5/16	1 9/16	3 9/16	10	15
CWS 304	61	20-22	7/8	8 7/8	4 15/16	1 5/8	1 7/8	4 5/16	10 1/2	20
CWS 305	83	24-26	1	11 7/16	5 1/8	1 15/16	2 3/16	4 15/16	13 3/8	31
CWS 306	99	27-29	1 1/8	12 13/16	5 11/16	2 3/8	2 3/4	6	15 3/16	49
CWS 307	121	30-32	1 1/4	14 3/16	6 5/16	2 11/16	2 15/16	6 1/2	16 7/8	66
CWS 308	138	34-36	1 3/8	15 3/4	7 1/16	2 11/16	2 15/16	6 1/2	18 7/16	84
CWS 309	165	37-39	1 1/2	19 11/16	9 7/16	2 13/16	3 1/8	7 5/16	22 1/2	108
CWS 310	187	40-42	1 5/8	23 5/8	12 3/16	3 1/8	3 9/16	8 1/4	26 3/4	143
CWS 311	248	43-48	1 3/4 - 1 7/8	25 3/16	12 13/16	3 9/16	3 15/16	8 7/8	28 3/4	220
CWS 312	309	49-52	2	28 3/8	14 3/4	3 15/16	4 5/16	9 5/8	32 5/16	331
CWS 313	397	54-58	2 1/4	30 1/2	15 3/4	4 5/16	4 3/4	10 7/16	34 13/16	353
CWS 314	468	61-64	2 1/2	35 7/16	18 1/2	4 15/16	5 1/8	11 13/16	40 3/8	507
CWS 315	507	72-76	3	39 3/8	16 12/16	5 1/8	5 7/8	13	44 1/2	794
CWS 316	689	81-86	3 1/4 - 3 3/8	44 5/16	21 5/8	5 5/16	6 1/2	14 3/16	49 5/8	937

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
Meets performance requirements of API 2C.



ROPEBLOCK